

# digiSTRIP DB5



IDEAL FOR SPECIAL VIDEO  
SOLUTIONS AND FREE-  
FORM VIDEO SURFACES.




LOW WEIGHT  
ALUMINIUM ENCLOSURE  
GOOD HEAT DISSIPATION  
HIGH BRIGHTNESS  
HIGH RESOLUTION  
EASY TO INSTALL

## THIN, FLEXIBLE AND ABOVE ALL VERSATILE

Due to their low weight and handy size, the digiSTRIP DB5 is suitable for a multitude of projects with individual design possibilities and special formats. Creative and versatile.

With its compact design, the LED strips can be used individually and are perfectly suited to the design of stage scenery and special effects, events and trade fairs of any kind.

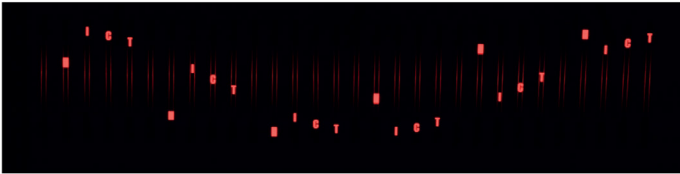

		digiSTRIP DB5
Physical Pixel Pitch (HxV) mm		5mm
Pixel Configuration		SMD 3-in-1
Pixel Resolution (Width/Height) pixels/panel		192 x 8
Panel Dimensions mm		960mm (wde) x 55mm (high) x 55mm (depth)
Standard Panel Area m2		0.0528
Standard Panel Weight kg		2
Ingress Protection (Front/Rear)		Indoor IP44/IP4
Maintenance Access		All Front
Refresh Rate Hz		N/A
Brightness (Normal) nits		>650
Enhanced Brightness nits		>1500
Input Voltage VAC		100~240
Normal Input Power (Average) watts/m2		199
Normal Input Power (Maximum) watts/m2		663
Control System		NovaStar
Mitering		Yes including 90 degrees
Certification		CE, EMC, LVD

Average figures are a typical assumption based on 30% of the peak value and may vary according to usage and media content shown. All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order. E&OE.





**digiLED**

Contact T +44 20 7381 7840 info@digiLED.com www.digiLED.com

THE LED  
SCREEN  
EXPERTS