


VERSATILE, CURVABLE & LIGHT FOR RENTAL & FIXED SCREENS



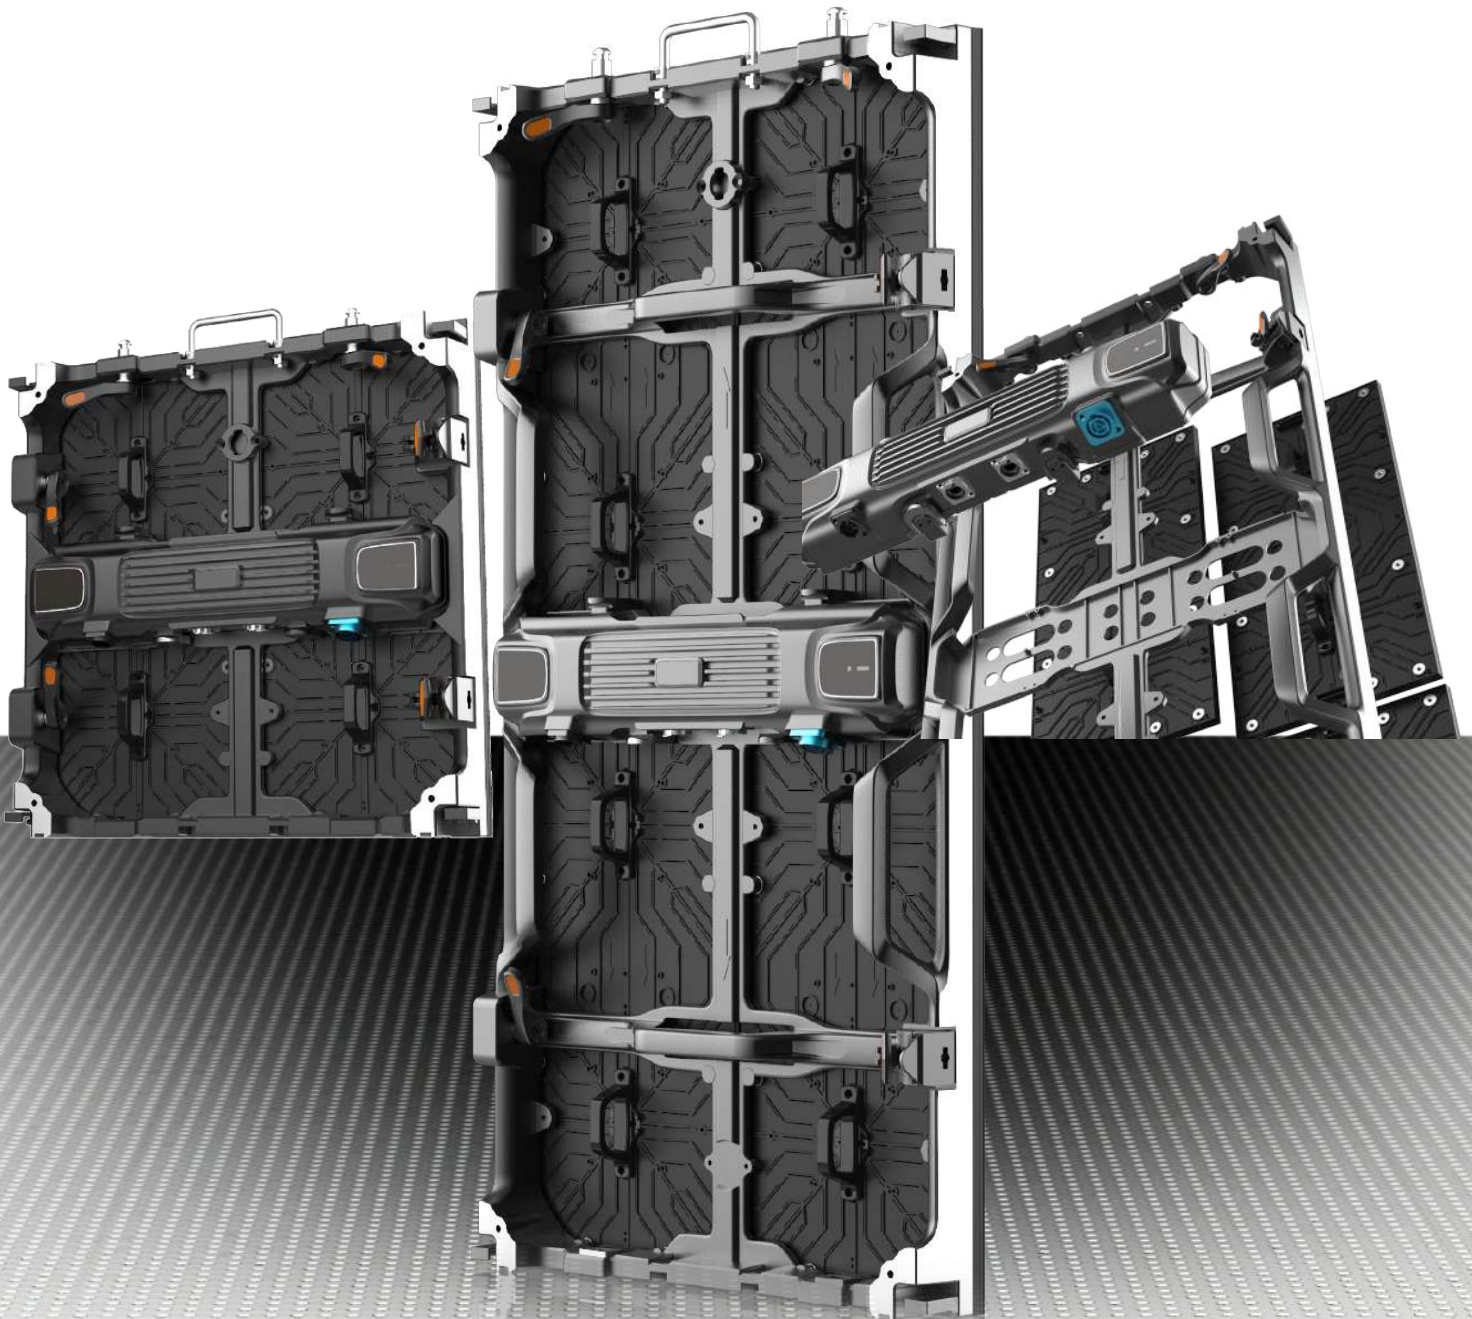

Curvable

Convex and concave curving at +/- 10 degrees per panel.



Lightweight

At 25kg/sqm, H-TEK is a perfect choice where weight limits are present for applications and installation needs to be quick and easy.



Corner and Edge Protection

Corner protection for cabinets and LED tile PCBs eliminating the risks of collision damage.



Rental & Fixed Installations

Suitable for both rental and fixed installations. Two chassis sizes available for fixed installation and standard 500 x 500mm rental panels available. Rental panels include convenient handles, quick lock mechanisms and PDPs containing all electronics, for easy installation.



Outdoor – 2.9mm

Outdoor pixel pitches start at 2.9mm, giving you improved viewing distances and high resolution content playback on all your outdoor applications.




5 Year Warranty

As with all digiLED Premium products, H-TEK comes with a 5 year warranty. Contact your local Service Lab via online RMA for our renowned fast turnaround.

- **H-TEK** features intelligent on-board flash memory, maintaining colour accuracy automatically.
- **H-TEK** features flexible and universal stacking and suspension accessories with digiLED H-TEK XR, X-TEK and X-TEK XR.
- **H-TEK** features a sealed PDU on the rear, protecting vulnerable control and power electronics from the ingress of particles and moisture.



Quick Lock
Mechanism

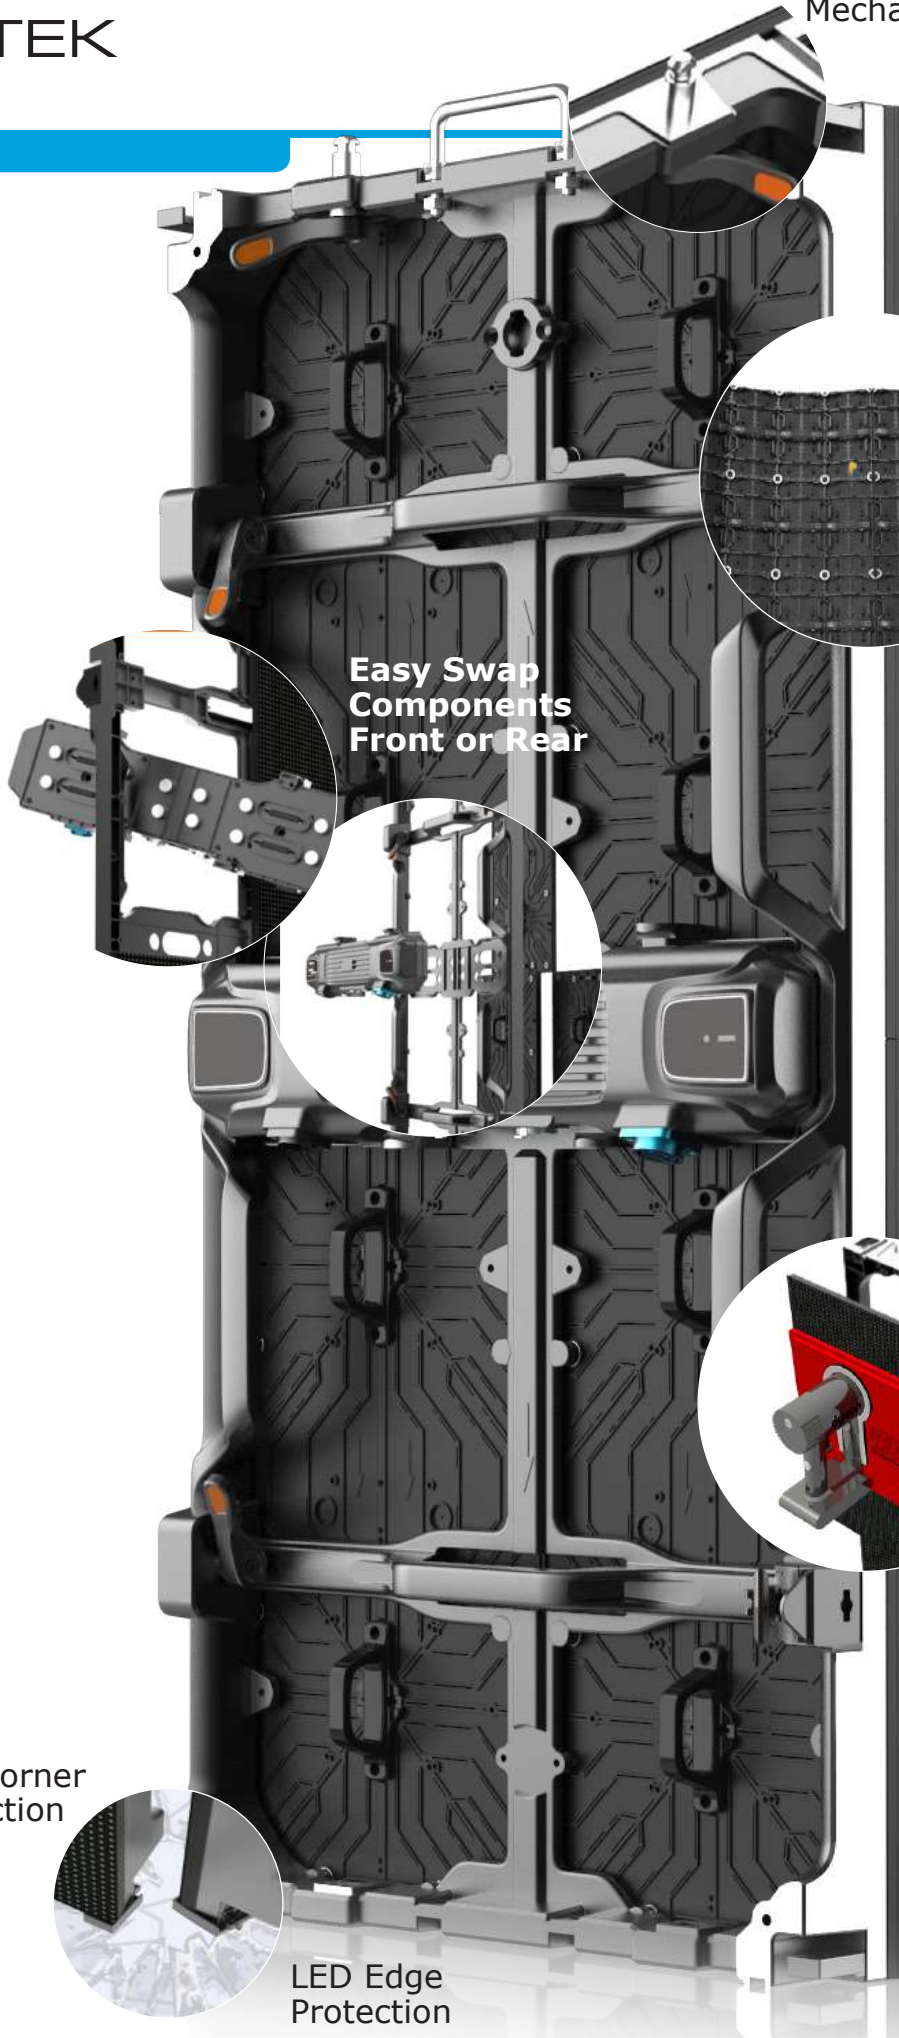

**Easy Swap
Components
Front or Rear**

**+/- 10 Degree
Curving Control**

**dAVE 250
Vacuum Tool For
Quick and Easy
LED Tile Removal**

**LED Corner
Protection**

**LED Edge
Protection**



500 x 500mm and 500 x 1000mm cabinets can be used for flexibility and convenience

500 x 500mm Cabinet



500 x 1000mm Cabinet



SPECIFICATIONS

INDOOR		H-TEK 2600	H-TEK 2980	H-TEK 3910
Physical Pixel Pitch (HxV) mm		2.604	2.976	3.906
Pixel Resolution (Width/Height) pixels/panel		192/384	168/336	128/256
Panel Dimensions (W x H x D) mm		500 x 1000 x 85		
Optional Panel Dimensions (W x H x D) mm		500 x 500 x 85		
Standard Panel Area m ²		0.5		
Standard Weight kg/m ²		34		
Ingress Protection (Front/Rear)		Indoor IP40/IP40		
Minimum Curving Radius degrees		3.0		
Corner Option Available drdegrees		Yes (90)		
Maintenance Access		All Front and All Rear		
Standard Refresh Rate Hz		≥2,880	≥2,880	≥1,920
Uncalibrated Brightness* nits		≥1300	≥1300	≥1300
Calibrated Brightness* nits		≥1100	≥1100	≥1100
Input Voltage VAC/Hz		100~240/50-60		
Max Power Consumption** W/sqm		550	520	520
Typical Working Power Consumption** W/sqm		165	156	156
Operating Temperature (min/max) degC		-10/+40		
Certification		CE (IEC82368-1 TBC), FCC, ETL, (EMC, LVD, RoHS): TBC		
HDR***		(see foot note)		

OUTDOOR		H-TEK 2980o	H-TEK 3910o	H-TEK 4810o	H-TEK 5900o
Physical Pixel Pitch (HxV) mm		2.976	3.906	4.808	5.952
Pixel Resolution (Width/Height) pixels/panel		168/336	128/256	104/208	84/168
Panel Dimensions (W x H x D) mm		500 x 1000 x 85			
Optional Panel Dimensions (W x H x D) mm		500 x 500 x 85			
Standard Panel Area m ²		0.5			
Standard Weight kg/m ²		35.2			
Ingress Protection (Front/Rear)		Indoor IP65/IP54			
Minimum Curving Radius degrees		3.0			
Corner Option Available drdegrees		Yes (90)			
Maintenance Access		All Front and All Rear			
Standard Refresh Rate Hz		≥2,880	≥1,920	≥1,920	≥1,920
Uncalibrated Brightness* nits		≥4500	≥5500	≥5500	≥5500
Calibrated Brightness* nits		≥4000	≥5000	≥5000	≥5000
Input Voltage VAC/Hz		100~240/50-60			
Max Power Consumption** W/sqm		650	720	650	630
Typical Working Power Consumption** W/sqm		195	216	195	189
Operating Temperature (min/max) degC		-20/+45			
Certification		CE (IEC82368-1 TBC), (FCC, ETL, EMC, LVD, RoHS): TBC			
HDR***		(see foot note)			

All specifications are subject to change without prior notification. E&OE.

Specifications are for standard system configuration. Contact your digiLED expert for detailed specification.

*The figures shown for brightness are standard guideline figures only and based on average test laboratory conditions.

** The figures shown for power consumption are standard guideline figures only and based on average test laboratory conditions.


***HDR: Subject to system configuration and processing.

PANEL INFORMATION


Front and Rear Servicing



Easy Component Swapping

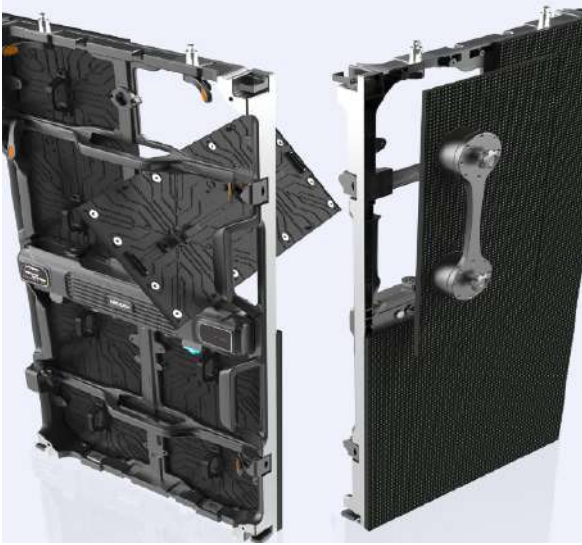


Edge Protection

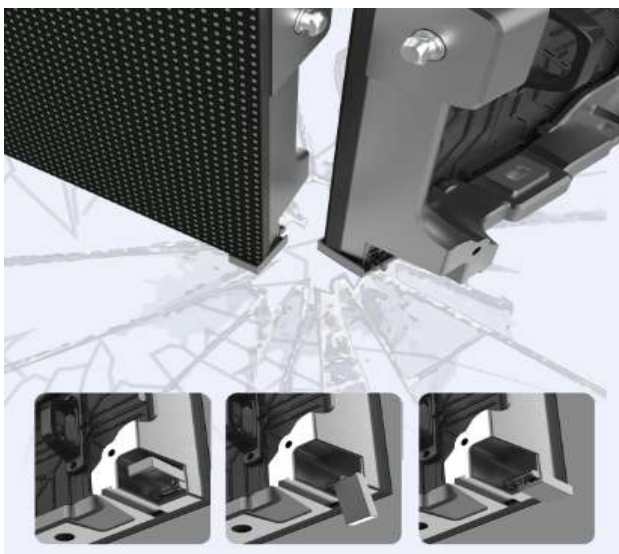

Concave and Convex Curving



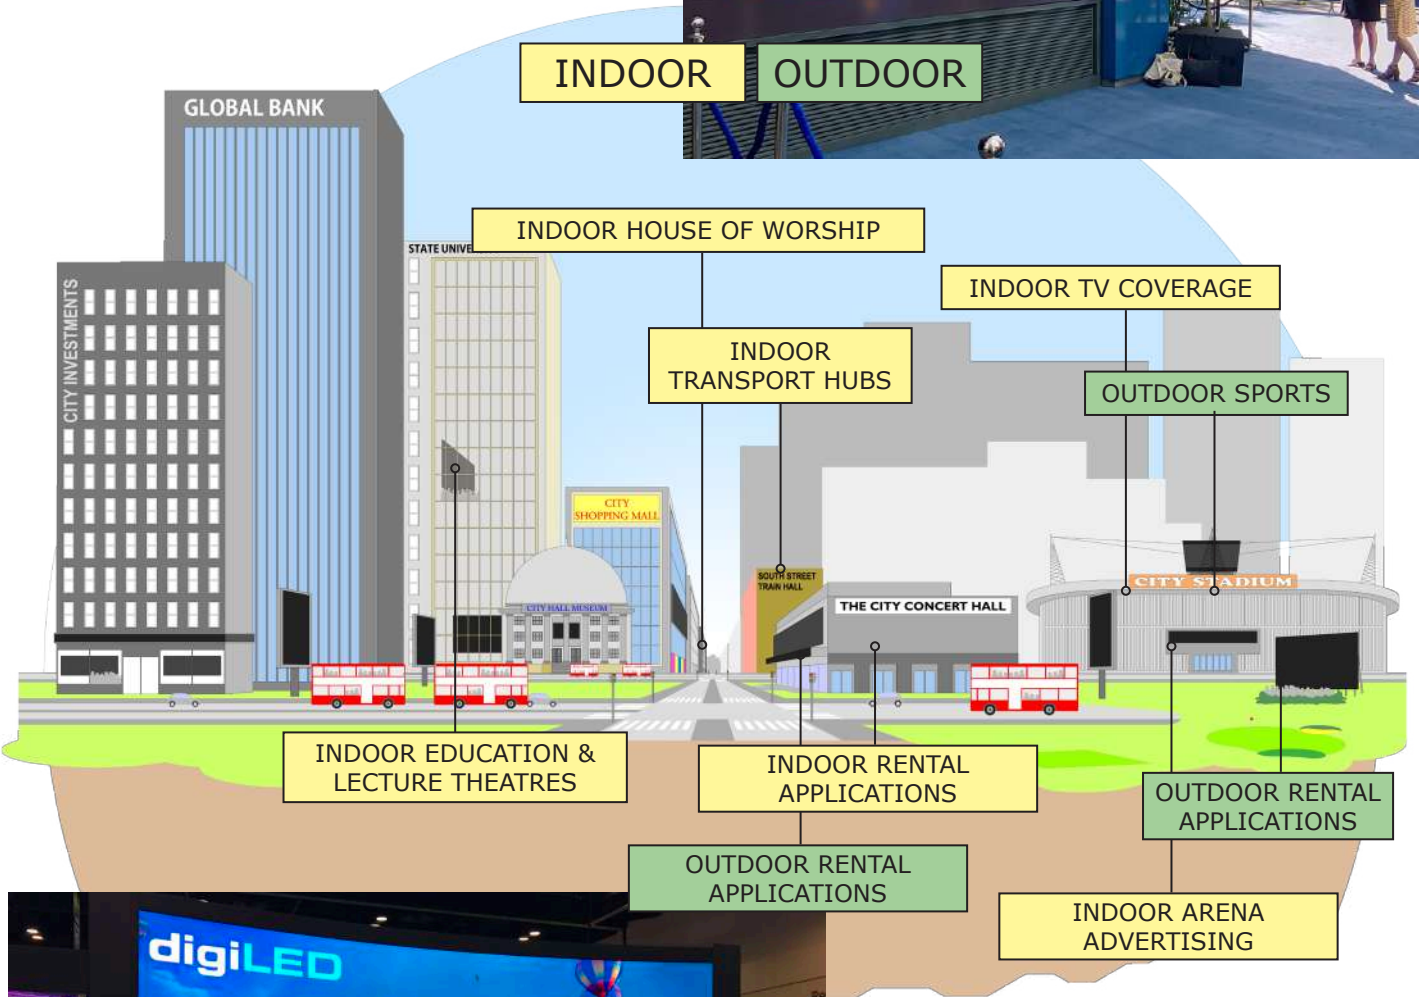



BUILT WITH PREMIUM COMPONENTS: THE HIGHEST GRADE PARTS THROUGHOUT



BACKED BY OUR OWN HIGHLY KNOWLEDGEABLE digiLED TECH HUB QC ENGINEERS, THE INDUSTRY'S LEADING QC TEAM



COMES WITH A 5 YEAR WARRANTY: TECH HUB SERVICES LOCATED in US, UK, ASIA and SOUTH AFRICA



INCLUDES AN ENHANCED & COMPREHENSIVE SPARES PACKAGE



AN APPRECIATION FOR QUALITY



BUILT IN TRUSTED, PREMIUM PARTNERS ASSEMBLY PLANTS: MONITORED AND QUALITY CONTROLLED BY digiLED TECH HUB ENGINEERS



SUBJECT TO A COMPREHENSIVE 228 STEP QC PROGRAMME FROM POINT OF ORDER RIGHT THROUGH TO HANDOVER



FULLY CERTIFIED: CE, UKCA, FCC, CCC, ETL, RoHS, LVD, EMC



OPTION: BUILT-IN digiLED's ZEUS POWER MANAGEMENT SYSTEM AT ADDITIONAL COST

Our Ethos

Our goal is to do business with suppliers and customers whose company we enjoy and whose principles and values we respect.

We endeavour to be politely firm in our beliefs and steadfastly uphold our standards by doing the job correctly to produce quality products, supplied with loving care, to customers who cherish our systems and the enthusiastic, friendly expertise we strive to provide.

We love our work and are proud of our experience and our expertise. We want to do business with people who see the benefits of what we do and appreciate our input.

digiLEDers are keen to offer advice and an insight into our specialist knowledge without demanding a commercial return, if we can't convince customers of our value, we don't deserve their patronage.

Our Products

Huge, bright, vibrant, bespoke digiLED screens are designed using premium components, by seasoned LED experts, then crafted and assembled in selected specialist factories.

Assembly, production and testing is monitored by the industry's leading QC team, using a proven 228-step manufacturing QC process, paying meticulous attention to fine detail.

The resulting digiLED screens exhibit superior images, providing reliable performance throughout the 5-year warranty period and beyond. Supported locally by experienced, qualified, field and bench engineers.

digiLED quality just lasts.



CONTACT US

LONDON

UK HEAD OFFICE

The Pixel Depot, Copse Farm, Moorhurst Lane, Beare Green, Surrey RH5 4LJ UK

tel: +44 20 7381 7840 e-mail: info@digiLED.com

 [Sales](#)  [Admin](#)  [Pixel Depot](#)  [Tech Hub](#)  [Service Lab](#)

LAS VEGAS

The Pixel Depot, 365 Pilot Road, Suite A, Las Vegas, Nevada, 89119, USA

tel: +44 20 7381 7840 e-mail: info@digiLED.com

 [Sales](#)  [Admin](#)  [Pixel Depot](#)  [Tech Hub](#)  [Service Lab](#)

DALLAS

digiLED Service Lab, 8291 Gateway Dr, Argyle, TX 76226, USA

 [Service Lab](#)

SHENZHEN

SHENZHEN DIGI TECHNOLOGY CO. LTD,





The Pixel Depot, Room 1807, Haohai Junyue Bldg, 2092 Shenyan Road, Hai Shan Street, Yantian District, Shenzhen 518000, China

 [Tech Hub](#)  [Logistics](#)  [Service Lab](#)

SALES OFFICES IN MILAN, THE HAGUE, NANTES AND TOKYO

TALK TO US AND BE SOCIAL

+44 20 7381 7840 info@digiLED.com www.digiLED.com

 [digiLED_](#)  [digiLEDscreens](#)  [digiLEDscreens](#)  [digiLED_](#)